

WALL PROTECTION SOLUTION

Water-resistant interior wall protection

IKOpro Hydrofuge X Liquid



ROOFMART
IRELAND


A colourless, water-repellent and breathable coating that protects all vertical exterior walls from rain penetration and dirt without changing the appearance of the wall.




RAIN PROTECTION SOLUTION penetrates deep into any porous substrate and ensures a durable, vapour-permeable moisture barrier against water penetration. This prevents frost damage and combats the formation of moss.



Protects your walls against rain penetration and dirt



Does not change the appearance of the wall



Vapour permeable



Environmentally friendly and safe to use



Easy to apply

Application

For use on unpainted, vertical, porous interior and exterior walls and façades made of concrete, brick, plaster and sand-lime brick.


How do I prepare the surface?

First make sure the surface is free of dust. If the substrate is very dirty, clean it with a pressure washer.

Remove any paint residue and salt crystals with a stiff brush.

Seal cracks larger than 2 mm with colour-matched mortar or mastic and repair bad grouting.

Make sure the substrate is reasonably dry before application.

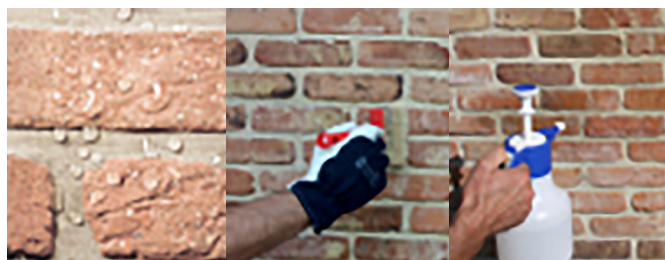

How do I use the product?

The substrate needs to be dry, at least 3 consecutive days without rain.

The substrate needs to be sound, clean and free from grease and non-adhering particles.

Remove the existing efflorescence first by washing the surface with diluted acid (1 litre chloric acid or hydrogen chloride per 40 litres of water) followed by thorough cleaning with water.

Algae and fungi must be removed with a stiff broom and the surface treated with IKO pro Algae and Fungi Remover.

Check the condition of the joints; repair weathered joints and cracks > 2mm beforehand.

Only apply IKO pro Hydrofuge X to masonry that is at least one month old, with joints that have completely cured.

The application temperature should be between 5°C and 25°C. Don't apply in the full sun.

Treat the substrate until complete saturation, until the product no longer penetrates the material: crosswise, with a low pressure spray unit, in one or two layers or with a brush or roller, in 2 layers, with approximately 2 hours between both layers.

Handy tips

- ✓ Store in a cool (max. 20°C) and frost-free place.
- ✗ It cannot be applied to painted or plastered walls.
- ✗ Never apply in direct sunlight or when rain is expected within 4 hours.
- ✓ The substrate and ambient temperature must be above +5°C and below +25°C during application and drying.
- ✓ Cover adjacent paintwork, sills, windows, glass, window frames, bluestone, tiles, etc. to protect against stains. Remove stains immediately with water.
- ✓ It is suitable for virtually all facing bricks. However, more and more pigments are being added to facing bricks. Always carry out a test on an inconspicuous area to check that the appearance of the bricks is not undesirably altered.
- ✓ Clean tools with water immediately after use.



DUBLIN NORTH

Unit 502
Northwest Business Park
Ballycoolin
D15 CP3V

T: 01 885 5090
E: dublinnorth@roofmart.ie

DUBLIN SOUTH

Unit 5
Broomhill Business Complex
Tallaght
D24 X270

T: 01 417 9641
E: dublinsouth@roofmart.ie

CORK

Unit 3
South Ring West Business Park
Tramore Road, Cork
T12 FC60

T: 021 431 7903
E: sales@roofmart.ie

BELFAST

2-4 Old Church Road
Newtownabbey
County Antrim
BT36 7LU

T: 028 9086 7079
E: belfast@roofmart.co.uk

Whilst every care is taken to see that the information given in this literature is correct and up to date it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded. Intending purchasers of our materials should therefore verify with the company whether any changes in our specification or application details or otherwise have taken place since this literature was issued. **April 2026.**

WWW.ROOFMART.IE
WWW.ROOFMART.CO.UK