

Waterproofing for pitched roofs

Galvanised metal tile roofing sheet



Roofmart Metrotile

Roofmart Metrotile is used for waterproofing and sound-absorbing on all pitched roofs, both old and new roof constructions.

A ingenious design allows tiles to be overlapped both vertically and horizontally without cutting and/or trimming.



Roofmart Metrotile

Universal 2m² galvanised metal tile roofing sheet for all pitched roofs. It allows you to install 65 tiles in one go, and the adapted tile profile for smaller roof areas provides a more aesthetic final result. Each sheet is 5 tiles wide and 13 tiles high. Its ingenious design (65 tiles per sheet) makes it suitable for any roof. The tiles can be overlapped both vertically and horizontally without cutting and/or trimming. Quick, easy and no waste, which is good for the environment.



Easy and fast installation



Strong, durable & sound-absorbing



No reinforced roof structure required



Apply directly to existing roofing



20+ years life expectancy




How do I use the product?

1. Place a chalk line about 5 cm from the top of the ridge. This will be the top of the top row of roofing sheets.
2. Place verge caps on both sides of the roof. Distribute them evenly up to the chalk line. Screw them in place with at least 2 screws. Each verge cap is provided with a neutral zone of up to 7.5 cm. This space is used to unify a proportional distribution of plates.
3. Always work per full row, from left to right and bottom to top.
4. Distribute the bottom row of sheets evenly between the verge caps and secure them at the bottom with 2 screws.
5. Screw each sheet in place with the materials developed for this purpose. Use 9 screws per sheet. Always screw into the valley of the tile about 2 cm below the nose.
6. The top row of sheets should more or less reach the chalk line.
7. Then seal the ends of the ridge with a ridge cap end by fixing the end piece on top of the verge caps. Distribute the ridge caps evenly along the entire length of the roof. Screw them in place at the overlaps. Screw the first and last ridge caps onto the verge caps.

Roofmart Metrotile

A versatile galvanised metal tile roofing sheet

- ✓ Flat tile with a modern look
- ✓ Easy & fast installation
- ✓ Tiles can be overlapped both vertically and horizontally without cutting and/or trimming
- ✓ Can be applied directly to existing roof covering

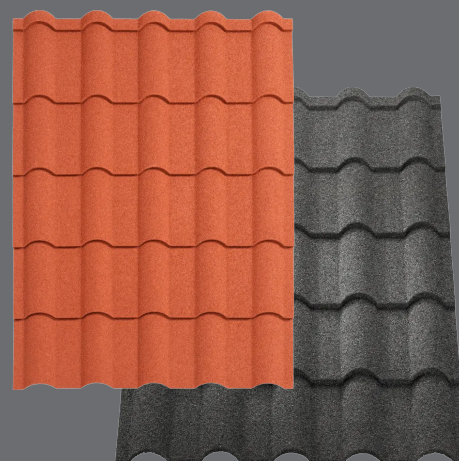

DUBLIN NORTH

Unit 502
Northwest Business Park
Ballycoolin
D15 CP3V

T: 01 885 5090
E: dublinnorth@roofmart.ie

DUBLIN SOUTH

Unit 5
Broomhill Business Complex
Tallaght
D24 X270

T: 01 417 9641
E: dublinsouth@roofmart.ie

CORK

Unit 3
South Ring West Business Park
Tramore Road, Cork
T12 FC60

T: 021 431 7903
E: sales@roofmart.ie

BELFAST

2-4 Old Church Road
Newtownabbey
County Antrim
BT36 7LU

T: 028 9086 7079
E: belfast@roofmart.co.uk

Whilst every care is taken to see that the information given in this literature is correct and up to date it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded. Intending purchasers of our materials should therefore verify with the company whether any changes in our specification or application details or otherwise have taken place since this literature was issued. **April 2026.**

WWW.ROOFMART.IE
WWW.ROOFMART.CO.UK